



APP CRS	Rwy Idg	3416
125°	TDZE	1924
	Apt Elev	1924


RNAV (GPS) RWY 12

NEW TOWN MUNI (Ø5D)

RNP APCH.	MISSED APPROACH: Climb to 4500 direct SUSUE and hold.
▼ ▲ NA	Use Stanley altimeter setting, when not received, use Tioga altimeter setting and increase all MDAs 40 feet. Increase Cat C visibilities ¼ SM. Rwy 12 helicopter visibility reduction below ¾ SM NA.

MINNEAPOLIS CENTER 127.6 279.6	CTAF 122.9 0
-----------------------------------	-----------------

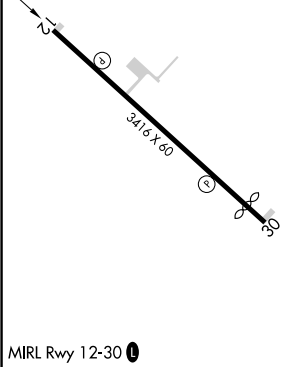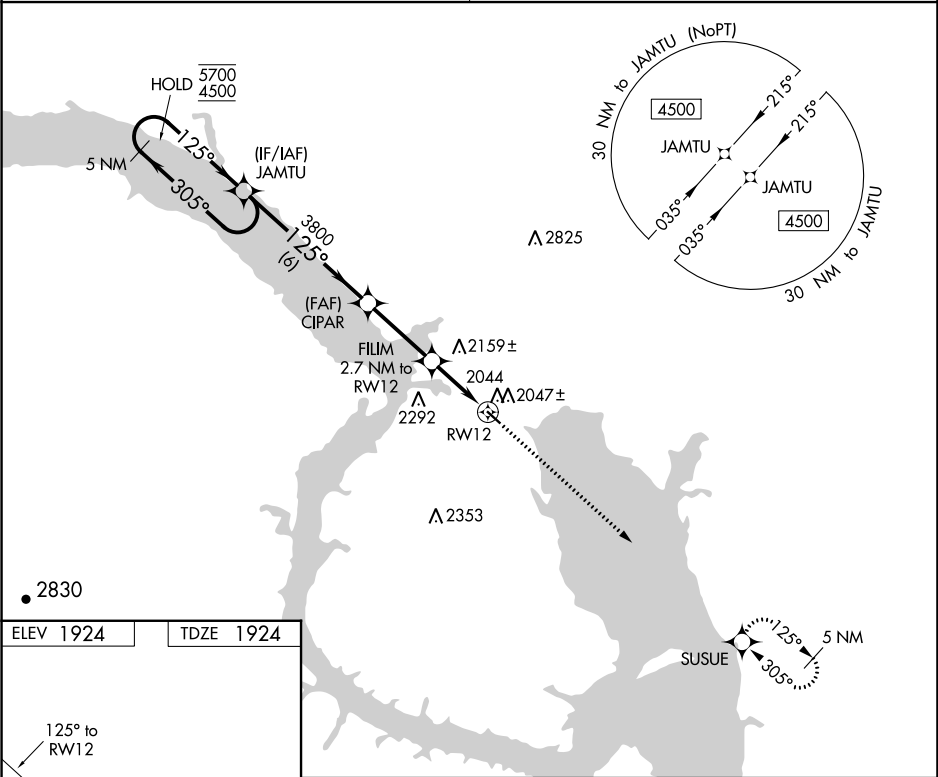

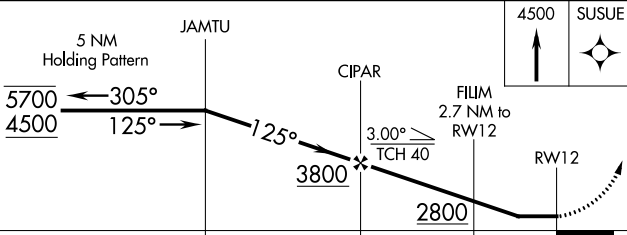 4500 SUSUE 5 NM Holding Pattern JAMTU CIPAR FILM 2.7 NM to RW12 RW12 5700 4500 305° 125° 125° 3800 3.00° TCH 40 2800 6 NM 3.1 NM 2.7 NM					
CATEGORY	A		B	C	D
LNAV MDA	2440-1		516 (600-1)	2440-1 $\frac{3}{8}$ 516 (600-1 $\frac{3}{8}$)	NA
 CIRCLING	2520-1 596 (600-1)		2620-1 696 (700-1)	2780-2 $\frac{1}{2}$ 856 (900-2 $\frac{1}{2}$)	NA