

LOC/DME I-ALI <u>109.3</u> Chan 30	APP CRS 308°	Rwy Idg 5997 TDZE 174 Apt Elev 178
--	------------------------	---

LOC/DME RWY 31
ALICE INTL (ALI)

RADAR required for procedure entry from Corpus Christi CRP VORTAC.


▼ VDP NA when using Nueces County altimeter setting. When local altimeter setting not received, use Nueces County altimeter setting and increase all MDAs 60 feet and S-LOC 31 visibility Cat C/D $\frac{1}{4}$ SM, and Circling visibility Cat D $\frac{1}{4}$ SM. For inop ALS when using Nueces County altimeter setting, increase S-31 Cats C, D visibility to $1\frac{1}{2}$ SM.

MALS



MISSED APPROACH: Climb to 1500 then climbing left turn to 2000 on direct ALI VOR and hold.

ASOS 119.225	KINGSVILLE APP CON ★ 119.9 290.45	UNICOM 123.0 (CTAF) 0
------------------------	---	--

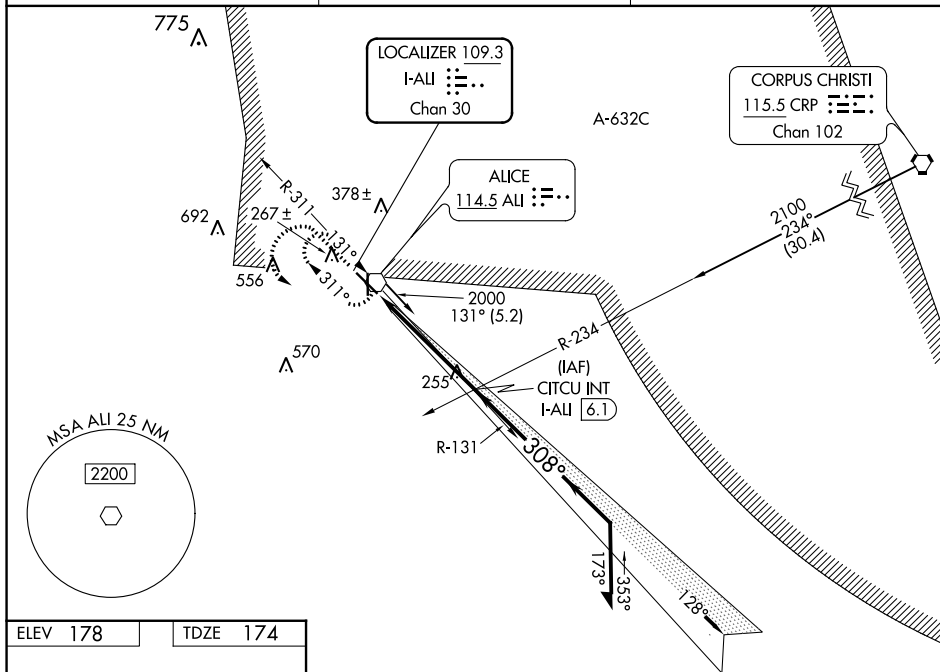

ELEV 178		TDZE 174
----------	--	----------

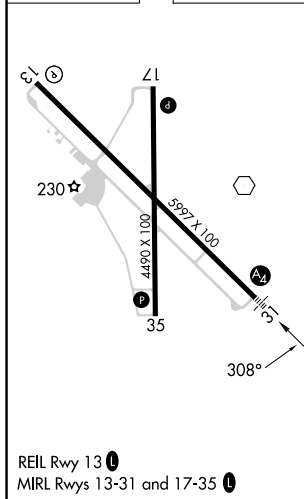


Diagram illustrating a circling approach profile. The profile shows a descent path from 2000 feet to 1800 feet, then a climb to 2000 feet. Key parameters include:

- Altitudes:** 1500, 2000, 1800, 2000.
- Angles:** 128°, 308°, 3.04°.
- Distances:** 1 NM, 3.9 NM.
- Parameters:** I-ALI 1.2, I-ALI 2.1, I-ALI 6.1, TCH 47.
- Legend:**
 - 1500: Upward arrow
 - 2000: Curved arrow
 - ALI: Hexagon symbol
- Text:** "VGS1 and descent angles not coincident.", "Remain within 10 NM".

CATEGORY	A	B	C	D
S-31		520- $\frac{3}{4}$	346 (400- $\frac{3}{4}$)	
CIRCLING	600-1 422 (500-1)	640-1 462 (500-1)	700-1 $\frac{1}{2}$ 522 (600-1 $\frac{1}{2}$)	900-2 $\frac{1}{4}$ 722 (800-2 $\frac{1}{4}$)