

CLEVELAND, OHIO


AL-84 (FAA)

22139

WAAS CH 40109 W28A	APP CRS 281°	Rwy Idg 6018 TDZE 799 Apt Elev 799
--	------------------------	---

RNAV (GPS) RWY 28
CLEVELAND-HOPKINS INTL (CLE)

RNP APCH.			MALSF 		MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 direct DJB VOR/DME and hold.	
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Circling Rwy 10 NA at night. Inop table does not apply to LPV.						
D-ATIS ARR 127.85 DEP 132.375		CLEVELAND APP CON 126.55 346.325	CLEVELAND TOWER 124.5 273.45	GND CON 121.7 273.45	CLNC DEL 125.05 273.45	CPDLC

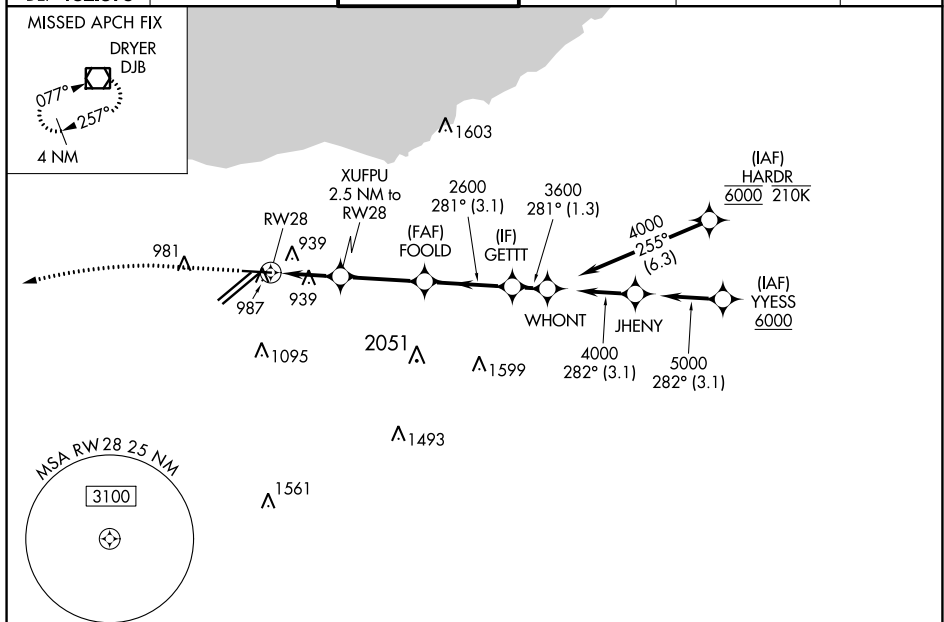

ELEV 799 **D** TDZE 799

CATEGORY	A	B	C	D
LPV DA	999/40	200 (200-¾)		
LNAV/VNAV DA	1168/40	369 (400-¾)		
LNAV MDA	1260/40	461 (500-¾)	1260/60	461 (500-1½)

REIL Rwy 10
TDZ/CL Rwy 6L, 6R, 24L, and 24R
HIRL Rwy 6L-24R, 6R-24L and 10-28

EC-2, 22 FEB 2024 to 21 MAR 2024

EC-2, 22 FEB 2024 to 21 MAR 2024