

WAAS
CH **86419**
W14A

APP CRS
139°

Rwy Idg
TDZE **755**
Apt Elev **755**

RNAV (GPS) RWY 14L

UNIVERSITY OF ILLINOIS/WILLARD (CMI)


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). When local altimeter setting not received, use Rantoul altimeter setting and increase all DA 41 feet and all MDA 60 feet, increase LNAV Cat C visibility ¼ mile. DME/DME RNP-0.3 NA. Baro-VNAV and ASR VDP NA when using Rantoul altimeter setting.

MISSED APPROACH:
Climb to 2600 direct ODEBE and hold.

ATIS 124.85	CHAMPAIGN APP CON ★ 121.35 285.65 (319°-138°) 132.85 290.225 (139°-318°)	CHAMPAIGN TOWER ★ 120.4 (CTAF) 0 229.4	GND CON 121.8	CLNC DEL 128.75	UNICOM 122.95
-----------------------	--	--	-------------------------	---------------------------	-------------------------

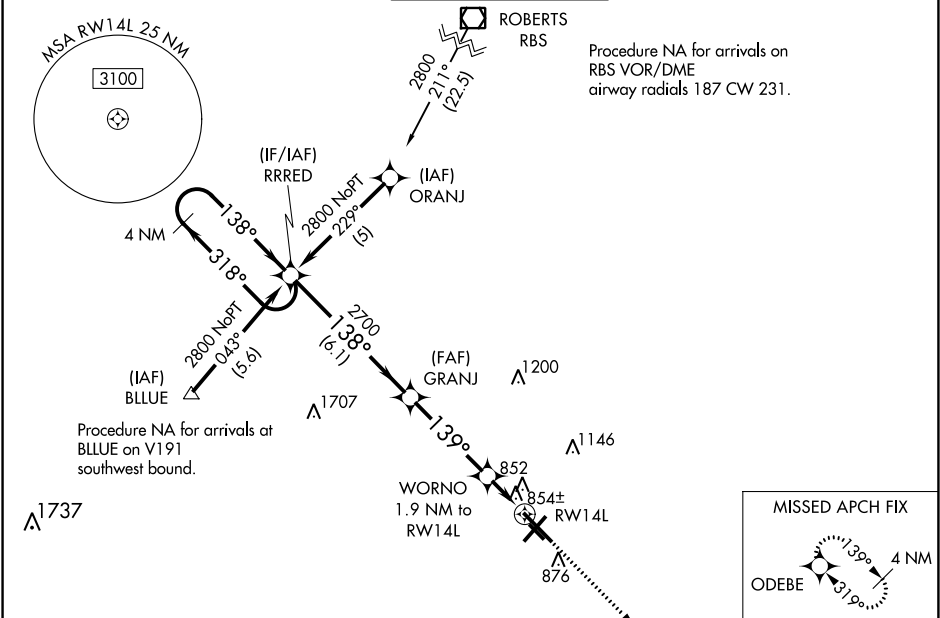

4 NM Holding Pattern					RRRED		2600		ODEBE	
2800 ← 318°					138° →		2700		GRANJ	
GP 3.00° TCH 48					2700		WORNO 1.9 NM to RW14L		*1380	
6.1 NM					4 NM		0.9		1 NM	
CATEGORY		A		B		C		D		
LPV DA		955-¾		200 (200-¾)						
LNAV/VNAV DA		1170-1½		415 (500-1½)						
LNAV MDA		1120-1 365 (400-1)		1120-1¼ 365 (400-1¼)						
CIRCLING		1240-1 485 (500-1)		1500-2¼ 745 (800-2¼)						

HIRL Rwy 14L-32R 1

MIRL Rwy 4-22 1

MIRL Rwy 14R-32L

TWR 825

6521 X 150

3816 X 73

32L

32R

1018

14R

14L

139°

139°

319°

139°