

WAAS	APP CRS	Rwy Idg	5002
CH 99321	240°	TDZE	144
W24B		Apt Elev	144

RNAV (GPS) Y RWY 24

CLINTON-SAMPSON COUNTY (CTZ)

RNP APCH-GPS.


▼

⚠

Rwy 24 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Kenansville altimeter setting and increase all MDAs 60 feet and visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 2500 direct WEXES and hold.

AWOS-3 119.125	FAYETTEVILLE APP CON 133.0 290.25	UNICOM 122.8 (CTAF) 0
-------------------	--------------------------------------	--------------------------

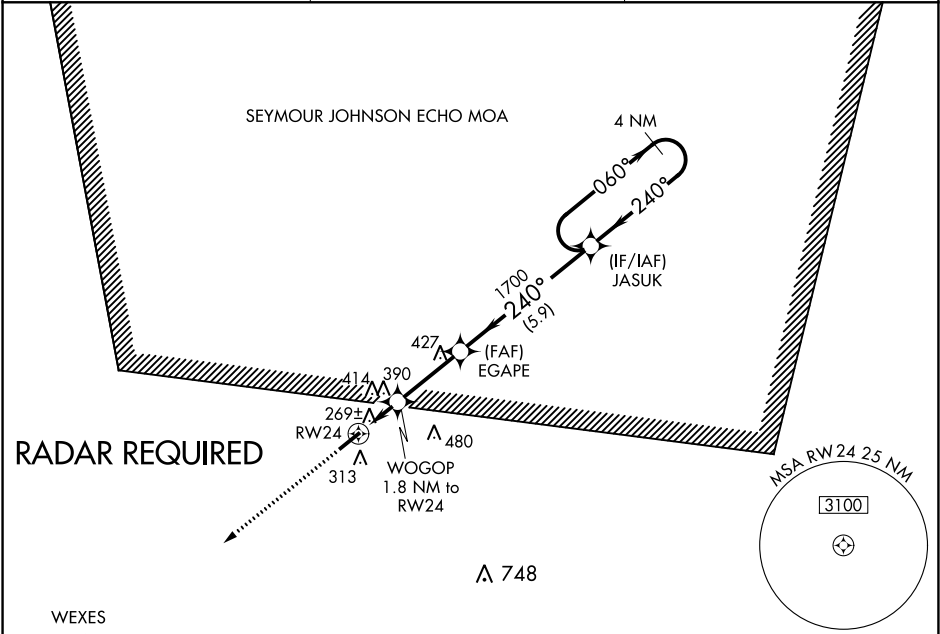

WEXES

2500

↑

WOGOP
1.8 NM to
RW24

EGAPE

JASUK

4 NM
Holding Pattern

3.00°
TCH 45

760

1700

2500

1.8

3 NM

5.9 NM

CATEGORY	A	B	C	D
LP MDA	560-1	416 (500-1)	560-1½	416 (500-1½)
LNAV MDA	640-1	496 (500-1)	640-1¾	496 (500-1¾)
CIRCLING	680-1 536 (600-1)	780-1 636 (700-1)	840-2 696 (700-2)	840-2¼ 696 (700-2¼)

ELEV 144

TDZE 144

240°

5008 X 75

0.3% UP

MIRL Rwy 6-24

REIL Rws 6 and 24 0