


WAAS CH 69217 W04A	APP CRS 044°	Rwy Idg 7701 TDZE 889 Apt Elev 913
--	------------------------	---

RNAV (GPS) RWY 4
CHIPPEWA VALLEY RGNL (EAU)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Rice Lake Rgnl/Carl's Fld altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rice Lake Rgnl/Carl's Fld altimeter setting and increase LPV DA to 1199, LNAV/VNAV DA to 1489 and all visibilities ½ SM. Increase all MDA 120 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM. Circling Rwy 32 NA at night.

MISSED APPROACH:
Climb to 3000 direct
IROKE and hold.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER* 118.575 (CTAF) 0	GND CON 120.925	UNICOM 122.95
-----------------	-----------------------------------	---------------------------------------	--------------------	------------------

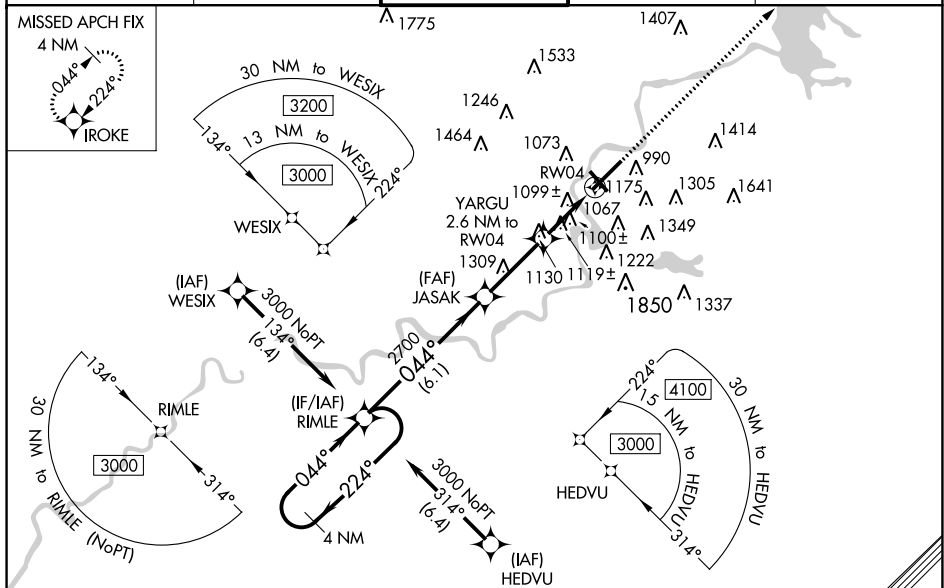

ELEV 913	D	TDZE 889
----------	----------	----------

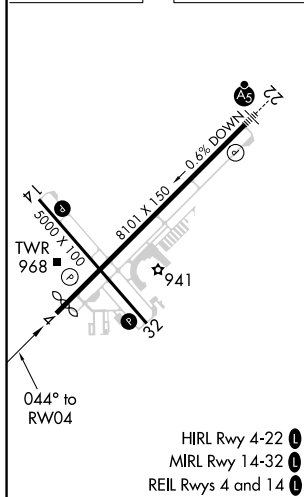

4 NM Holding Pattern

RIMLE

JASAK 2700

YARGU 2.6 NM to RW04

3000 ← 224°

044° →

2700

*1740

*1.3 NM to RW04

RW04

GP 3.00° TCH 44

6.1 NM

3 NM

1.3 NM

1.3 NM

3000

IROKE

*LNAV only

CATEGORY	A	B	C	D
LPV DA	1089-3/4 200 (200-3/4)			
LNAV/VNAV DA	1379-15/8 490 (500-15/8)			
LNAV MDA	1360-1	471 (500-1)	1360-13/8	471 (500-13/8)
CIRCLING	1480-1 567 (600-1)	1540-1 627 (700-1)	1660-21/4 747 (800-21/4)	2200-3 1287 (1300-3)