
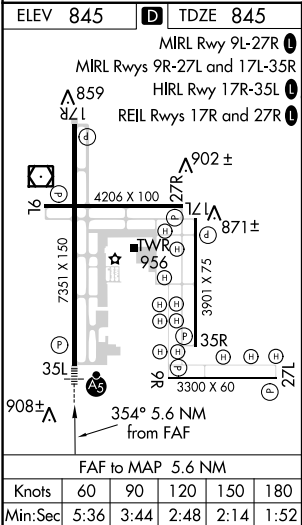


LOC/DME I-GFK 109.1 Chan 28	APP CRS 354°	Rwy Idg TDZE Apt Elev 7351 845 845
--	------------------------	--

ILS or LOC RWY 35L
GRAND FORKS INTL (GFK)

ADF or DME or RADAR REQUIRED.			MALSR 		MISSED APPROACH: Climb to 3600 then right turn direct GFK VOR/DME and hold.
VDP NA with Crookston altimeter setting. When local altimeter setting not received, use Crookston altimeter setting and increase DA to 1107 feet and all MDA 80 feet; increase S-LOC 35L Cats C/D/E visibility to RVR 4000 and Circling Cats C and E visibility ¼ SM. For inop ALS, increase S-ILS 35L Cat E visibility to RVR 4000 and S-LOC 35L Cat E visibility to RVR 5000. For inop ALS when using Crookston altimeter setting, increase S-ILS 35L all Cats visibility to RVR 4500 and S-LOC 35L Cat C/D/E visibility to RVR 6000. Procedure turn NA for Cat E aircraft, Radar required.			ATIS 119.4		GRAND FORKS APP CON 118.1 318.1
			GRAND FORKS TOWER 118.4 (CTAF) 350.35		GND CON 124.575
			CLNC DEL 135.725		UNICOM 122.95

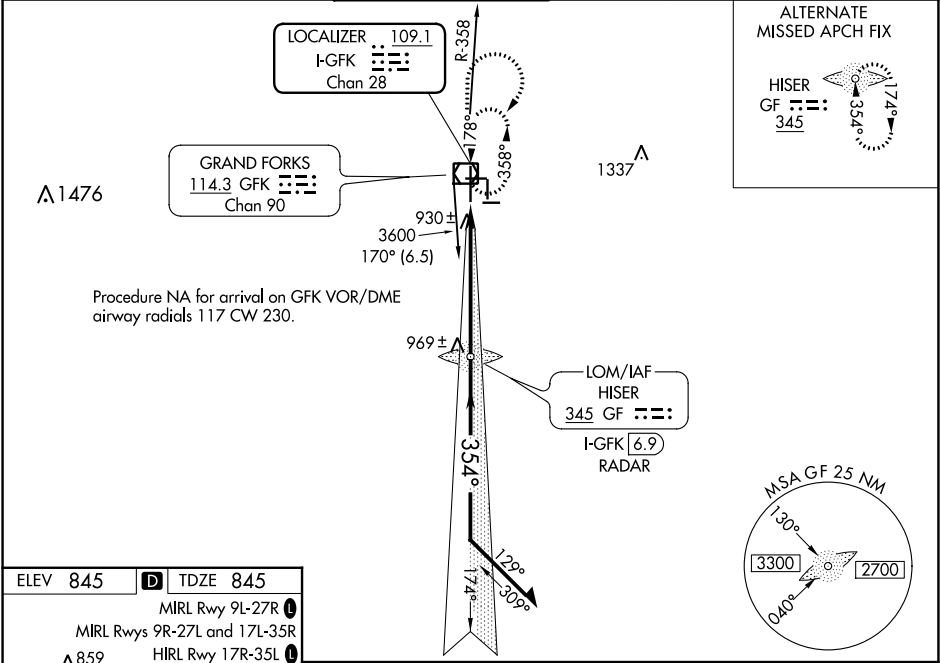

3600 ↑				GFK 		GF LOM HISER I-GFK [6.9] RADAR		Remain within 10 NM	
* LOC only.		* I-GFK [2.3]		I-GFK [1.4]		2536		174°	
						2600		354°	
						2600		GS 2.76° TCH 61	
		0.9 NM		4.6 NM					
CATEGORY	A		B		C		D		E
S-ILS 35L	1045/24 200 (200-½)								
S-LOC 35L	1180/24 335 (400-½)		1180/26 335 (400-½)						
 CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1400-1½ 555 (600-1½)	1400-2 555 (600-2)	1520-2½ 675 (700-2½)				