

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 72603 W05A | APP CRS 047° | Rwy Idg TDZE Apt Elev | 8000 956 956 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 5

DONALDSON FLD (GYH)



RNP APCH - GPS.

⚠ Baro-VNAV and VDP NA when using Greer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Greer altimeter setting and increase LPV DA to 1185 feet; increase LNAV/VNAV DA to 1279; increase all MDAs 40 feet and LNAV visibility Cats C and D ½ SM. For inop ALS, increase LNAV/VNAV visibility all Cats to ¾ SM and increase LNAV visibility Cats C/D to 1 ½ SM.




MISSED APPROACH:
Climb to 3000 direct ILEYO and hold.

| | | | | | |
|--------------------------|---|---|-------------------------|--------------------------|------------------------|
| AWOS-3 127.325 | GREER APP CON ★ 118.8 270.275 | DONALDSON TOWER ★ 133.325 (CTAF) 0 269.25 | GND CON 121.4 | CLNC DEL 121.4 | UNICOM 122.7 |
|--------------------------|---|---|-------------------------|--------------------------|------------------------|

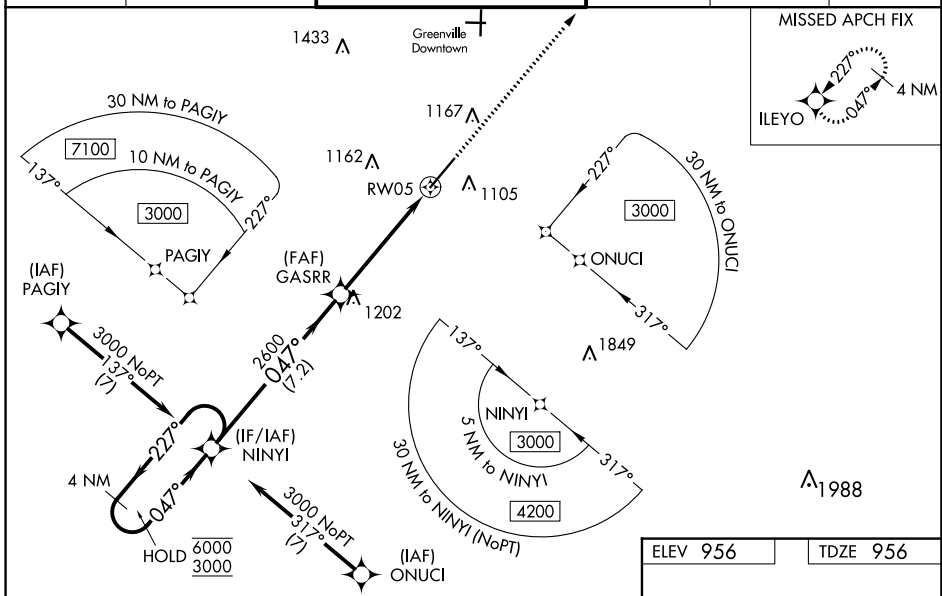


SE-2, 22 FEB 2024 to 21 MAR 2024

SE-2, 22 FEB 2024 to 21 MAR 2024

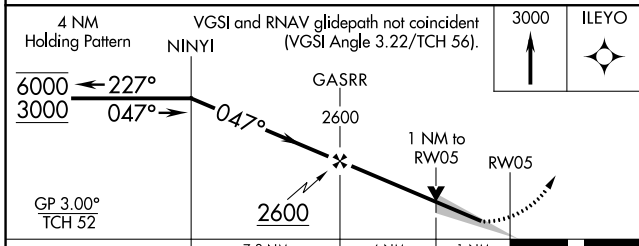

| | |
|----------|----------|
| ELEV 956 | TDZE 956 |
|----------|----------|

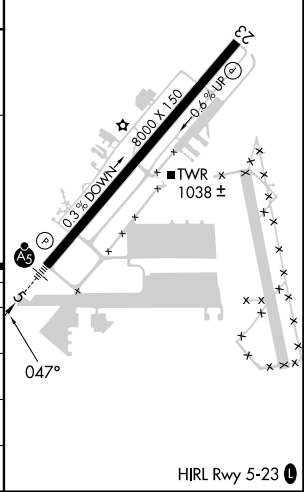

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|-------------------------|-----------------------|
| LPV DA | | 1156-½ | 200 (200-½) | |
| LNAV/VNAV DA | | 1250-½ | 294 (300-½) | |
| LNAV MDA | 1360-½ | 404 (500-½) | 1360-¾ | 404 (500-¾) |
| CIRCLING | 1420-1 464 (500-1) | 1480-1 524 (600-1) | 1480-1½ 524 (600-1½) | 1520-2 564 (600-2) |