

WAAS CH 42637 W04A	APP CRS 038°	Rwy Idg TDZE Apt Elev	5004 2387 2396
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4
HEMPHILL COUNTY (HHF)

RNP APCH - GPS.


▼

▲

Circling NA to Rwy 18 and 36. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use Gage altimeter setting and increase LPV DA to 2751; increase LNAV/VNAV DA to 2798 feet and all visibilities ¾ SM. Increase all MDAs 120 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM. VDP and Baro-VNAV NA when using Gage altimeter setting.

MISSED APPROACH:
Climb to 7000 direct ZIGUG and hold, continue climb-in-hold to 7000.

AWOS-3 119.025	ALBUQUERQUE CENTER 127.85 285.475	KANSAS CITY CENTER 126.95 379.2	CTAF 122.9 0
--------------------------	---	---	------------------------

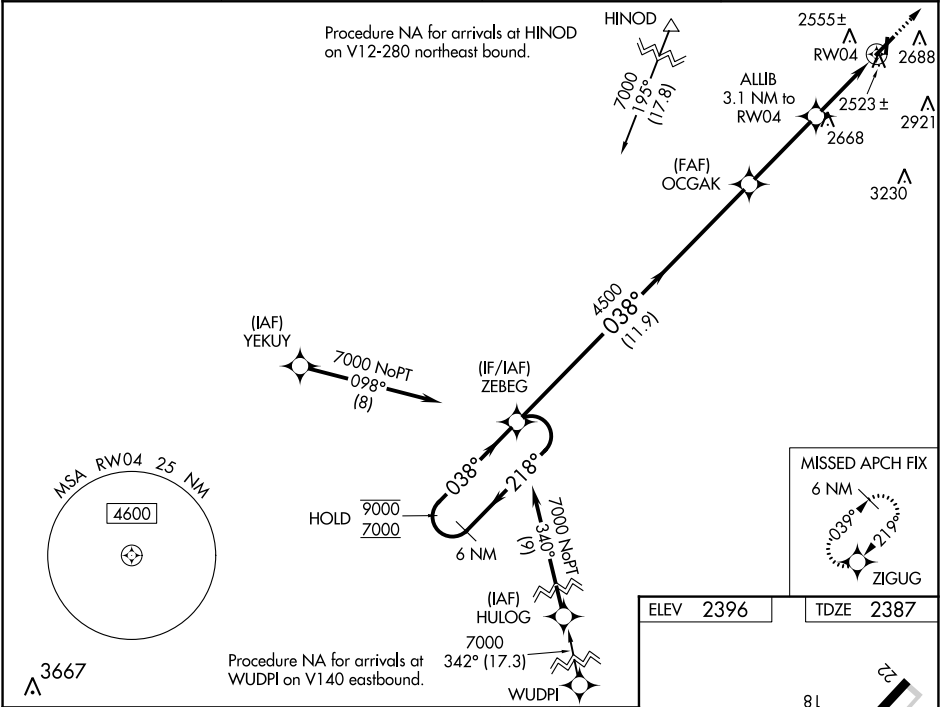

6 NM Holding Pattern		ZEBEG	7000 ZIGUG	
9000	218°	038°	OCGAK	ALLIB 3.1 NM to RW04
7000	038°		4500	1.1 NM to RW04
GP 3.00° TCH 38		4500	3400	RW04
		11.9 NM	3.4 NM	2 NM
CATEGORY	A	B	C	D
LPV DA	2637-1 250 (300-1)			
LNAV/VNAV DA	2684-1 297 (300-1)			
LNAV MDA	2780-1	393 (400-1)	2780-1½	393 (400-1½)
CIRCLING	3040-1	644 (700-1)	3280-2¾	3340-3
			884 (900-2¾)	944 (1000-3)

