



WAAS CH <b>93526</b> <b>W03A</b>	APP CRS <b>040°</b>	Rwy Idg <b>4688</b> TDZE <b>70</b> Apt Elev <b>76</b>
----------------------------------------	------------------------	-------------------------------------------------------------




# RNAV (GPS) RWY 3

LEESBURG INTL (L.E.E)

**⚠** DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Orlando Intl altimeter setting and increase all MDA 100 feet; increase LP, LNAV Cats C/D visibility  $\frac{3}{8}$  mile, Circling Cats C/D visibility  $\frac{1}{4}$  mile. When VGSI inop, Straight-in/Circling Rwy 3 procedure NA at night. When VGSI inop, Circling Rwy 21 NA at night.

**MISSED APPROACH:** Climb to 1000 then climbing right turn to 2000 direct MAMBO and hold.

ATIS <b>134.325</b>	ORLANDO APP CON <b>135.3 351.9</b>	LEESBURG TOWER <b>*</b> <b>119.35 (CTAF) 0</b>	GND CON <b>121.725</b>	GCO <b>121.725</b>	UNICOM <b>122.725</b>
------------------------	---------------------------------------	---------------------------------------------------	---------------------------	-----------------------	--------------------------

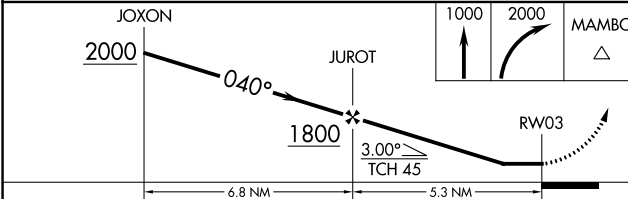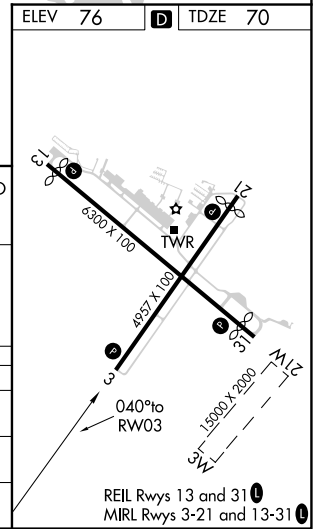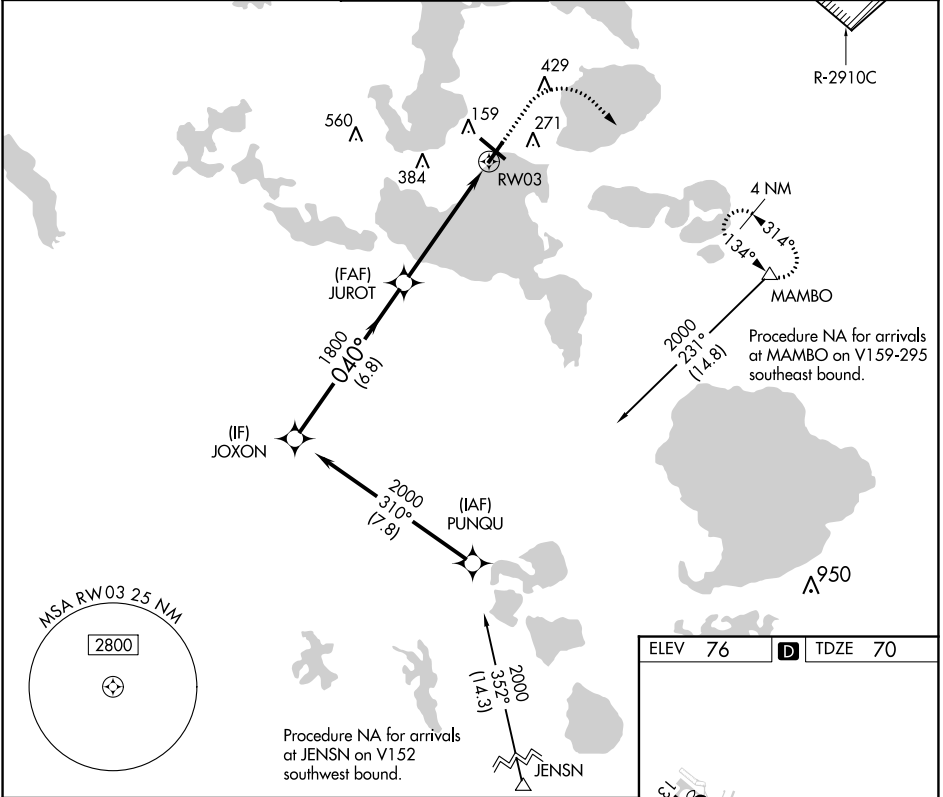

CATEGORY	A	B	C	D
LP MDA	580-1	510 (600-1)	580- $\frac{1}{8}$	510 (600- $\frac{1}{8}$ )
LNAV MDA	580-1	510 (600-1)	580- $\frac{1}{8}$	510 (600- $\frac{1}{8}$ )
CIRCLING	700-1	624 (700-1)	700- $\frac{1}{4}$ 624 (700- $\frac{1}{4}$ )	700-2 624 (700-2)

SE-3, 17 JUN 2021 to 15 JUL 2021

SE-3, 17 JUN 2021 to 15 JUL 2021

WAAS CH <b>97602</b> <b>W31A</b>	APP CRS <b>315°</b>	Rwy Idg <b>5900</b> TDZE <b>73</b> Apt Elev <b>76</b>
----------------------------------------	------------------------	-------------------------------------------------------------


# RNAV (GPS) RWY 31

LEESBURG INTL (L.E.E)



**⚠** Baro-VNAV NA when using Orlando Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Orlando Intl altimeter setting and increase all DA 85 feet and all MDA 100 feet; increase LPV all Cats visibility 1/8 mile, increase LNAV/VNAV all Cats, LNAV and Circling Cats C/D visibility 1/4 mile. When VGSI inop, Straight-in/Circling Rwy 31 procedure NA at night. When VGSI inop, Circling Rwy 3 and 21 NA at night.

**MISSED APPROACH:**  
Climb to 2000 direct IBPEP and hold.

ATIS <b>134.325</b>	ORLANDO APP CON <b>135.3 351.9</b>	LEESBURG TOWER * <b>119.35 (CTAF)</b>	GND CON <b>121.725</b>	GCO <b>121.725</b>	UNICOM <b>122.725</b>
------------------------	---------------------------------------	------------------------------------------	---------------------------	-----------------------	--------------------------

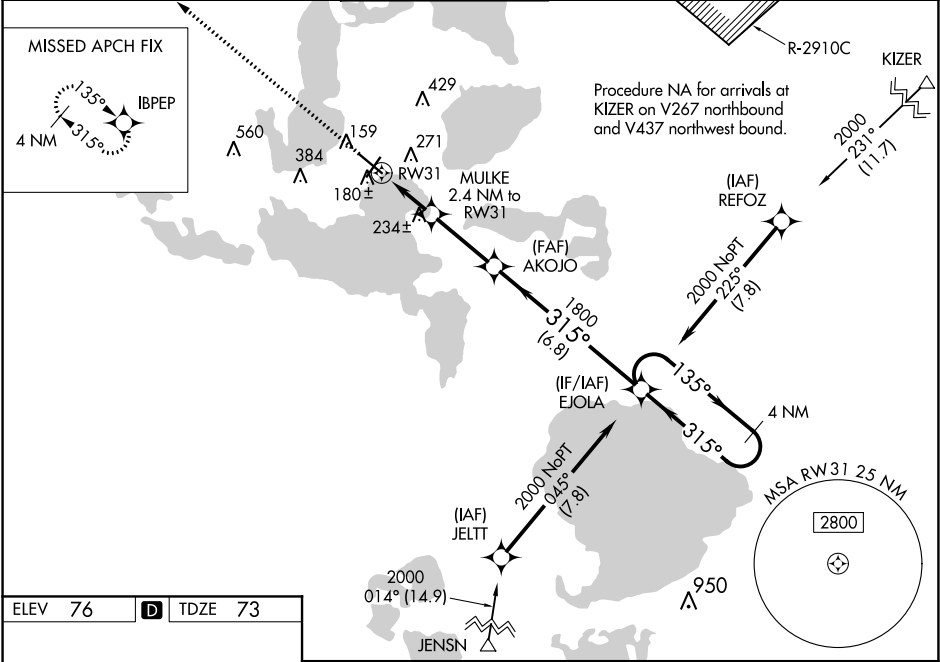

ELEV 76	<b>D</b>	TDZE 73
---------	----------	---------

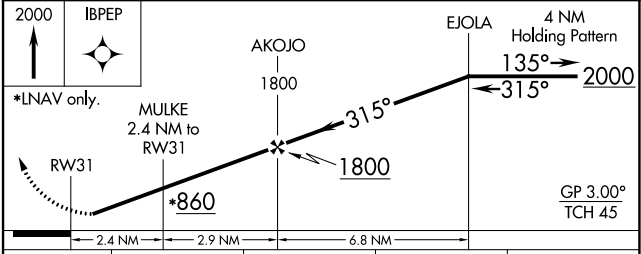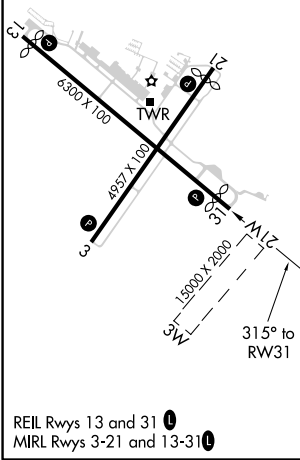

CATEGORY	A	B	C	D
LPV DA		323-1	250 (300-1)	
LNAV/VNAV DA		357-1	284 (300-1)	
LNAV MDA	500-1	427 (500-1)	500-1 1/4	427 (500-1 1/4)
CIRCLING	700-1	624 (700-1)	700-1 3/4	700-2 624 (700-1 3/4)

SE-3, 17 JUN 2021 to 15 JUL 2021

SE-3, 17 JUN 2021 to 15 JUL 2021