

WAAS CH 69419 W13A	APP CRS 136°	Rwy Idg TDZE 1140 Apt Elev 1140
--	------------------------	---

RNAV (GPS) RWY 13

LITCHFIELD MUNI (LJF)

RNP APCH - GPS.

▼


Baro-VNAV NA when using Hutchinson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54° C. Visibility reduction by helicopters

▲

NA. When local altimeter setting not received, use Hutchinson altimeter setting: increase LPV DA to 1436 feet; increase LNAV/VNAV DA to 1980 feet and visibility all Cats ¼ SM; increase all MDA 60 feet and Circling Cat C visibility ¼ SM. VDP NA with Hutchinson altimeter setting.

MISSED APPROACH:
Climb to 2800 direct
ANIML and hold.

AWOS-3 119.65	MINNEAPOLIS CENTER 125.5 323.1	CTAF 122.9 0
-------------------------	--	------------------------

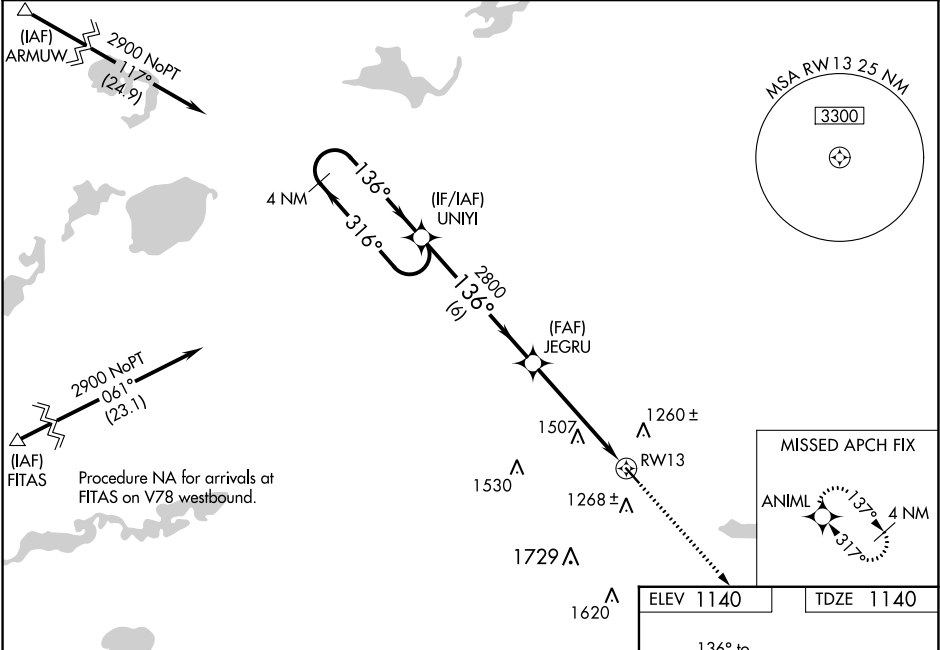

4 NM Holding Pattern

UNYI

2900 ← 316°

136° →

GP 3.00°

TCH 39

2800

136°

JEGRU

2800

* LNAV only

* 2 NM to RW13

RW13

6 NM

3 NM

2 NM

CATEGORY	A	B	C	D
LPV DA	1390-1 250 (300-1)			
LNAV/VNAV DA	1934-2¾ 794 (800-2¾)			
LNAV MDA	1820-1 680 (700-1)	1820-2 680 (700-2)	1820-2¼ 680 (700-2¼)	
CIRCLING	1820-1 680 (700-1)	1860-2 720 (800-2)	2080-3 940 (1000-3)	

ELEV 1140 TDZE 1140

136° to RW13

4022 X 100

REIL Rwy 13 and 31

MIRL Rwy 13-31


WAAS CH 40319 W31A	APP CRS 317°	Rwy Idg TDZE 1140 Apt Elev 1140	4002
--	------------------------	---	-------------

RNAV (GPS) RWY 31

LITCHFIELD MUNI (LJF)

RNP APCH - GPS. Baro-VNAV NA when using Hutchinson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When Local altimeter setting not received, use Hutchinson altimeter setting: increase LPV DA to 1435 feet; increase LNAV/VNAV DA to 1594 feet; increase all MDA 60 feet and LNAV and Circling Cat C visibility ¼ SM. VDP NA with Hutchinson altimeter setting.	MISSED APPROACH: Climb to 2900 direct UNYI and hold.
--	---

AWOS-3 119.65	MINNEAPOLIS CENTER 125.5 323.1	CTAF 122.9 0
-------------------------	--	------------------------

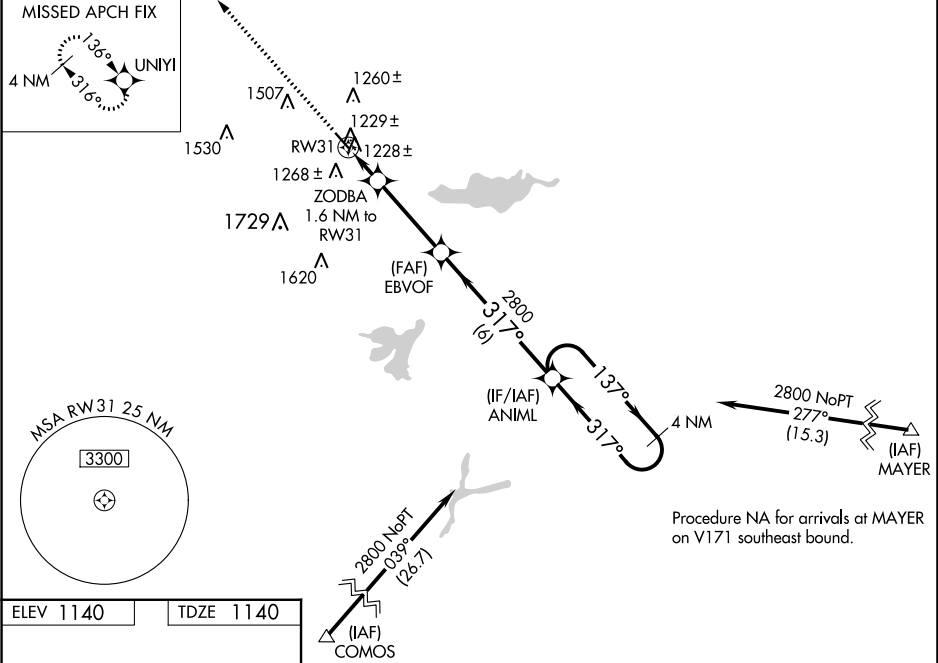

2900	UNYI	EBVOF	ANIML	4 NM Holding Pattern
* LNAV only	ZODBA 1.6 NM to RW31	2800	317°	137°
* 0.9 NM to RW31	1680*	2800	317°	2800
0.9	0.7	3.4 NM	6 NM	GP 3.00° TCH 39
CATEGORY	A	B	C	D
LPV DA	1389-1 249 (300-1)			
LNAV/VNAV DA	1548-1½ 408 (500-1½)			
LNAV MDA	1480-1 340 (400-1)			
CIRCLING	1600-1	460 (500-1)	1860-2 720 (800-2)	2080-3 940 (1000-3)

VORTAC DWN

109.0

Chan 27

APP CRS

277°

Rwy Idg TDZE

N/A

Apt Elev

N/A

1140

VOR-A


LITCHFIELD MUNI (LJF)

⚠

When local altimeter setting not received, use Hutchinson altimeter setting: increase all MDA 60 feet and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 1800 then climbing right turn to 2800 direct DWN VORTAC and hold.

AWOS-3 119.65	MINNEAPOLIS CENTER 125.5 323.1	CTAF 122.9 0
------------------	-----------------------------------	-----------------

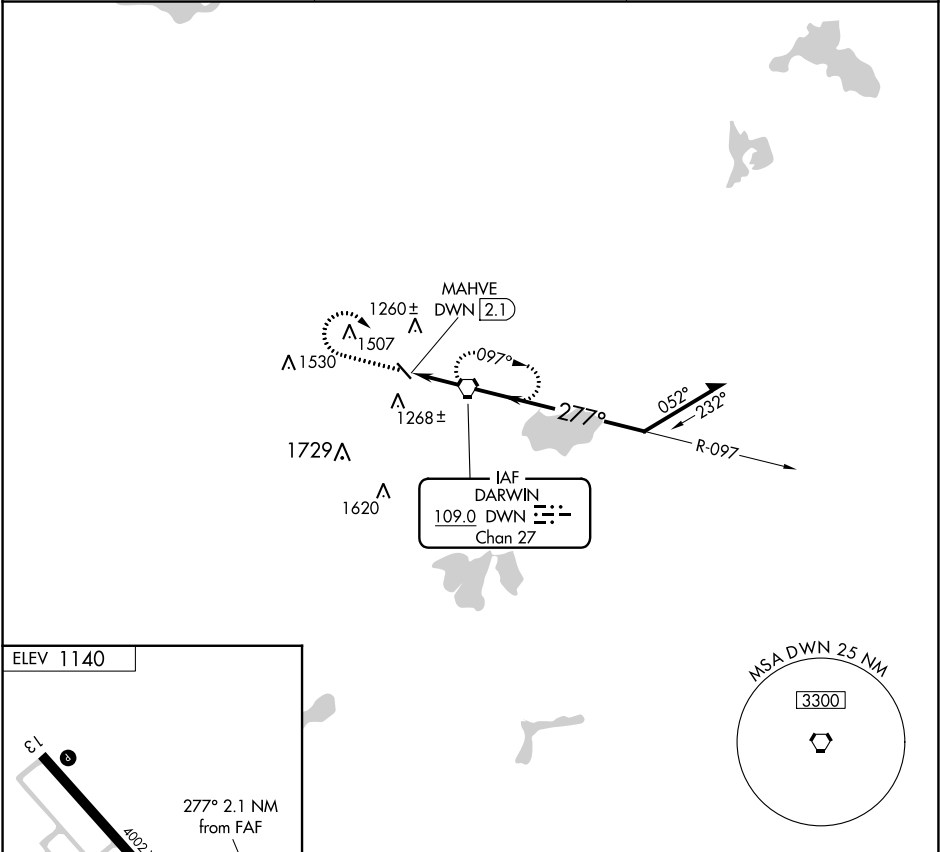

ELEV 1140		1800		2800		DWN		DWN VORTAC		Remain within 10 NM	
277° 2.1 NM from FAF		MAHVE DWN [2.1]		2300		097°		2800		277°	
2.1 NM		2.1 NM		2.1 NM		2.1 NM		2.1 NM		2.1 NM	
FAF to MAP 2.1 NM		CATEGORY		A		B		C		D	
Knots		60		90		120		150		180	
Min:Sec		2:06		1:24		1:03		0:50		0:42	
CIRCLING		1600-1		460 (500-1)		1860-2		720 (800-2)		2080-3	