RNAV (GPS) RWY 24

WINGS FLD (LOM)

WAAS	APP CRS	Rwy Idg	3700
CH 90419	245°	TDZE	295
W24A		Apt Elev	302

RNP APCH.

Baro-VNAV NA when using Pottstown altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Pottstown altimeter setting and increase all DA 35 feet and all MDA 40 feet. Rwy 24 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2200 direct PHILA and hold.

AWOS-3	PHILADELPHIA APP CON	CLNC DEL	UNICOM
118.925	126.85 263.125	118.55	123.0 (CTAF) L

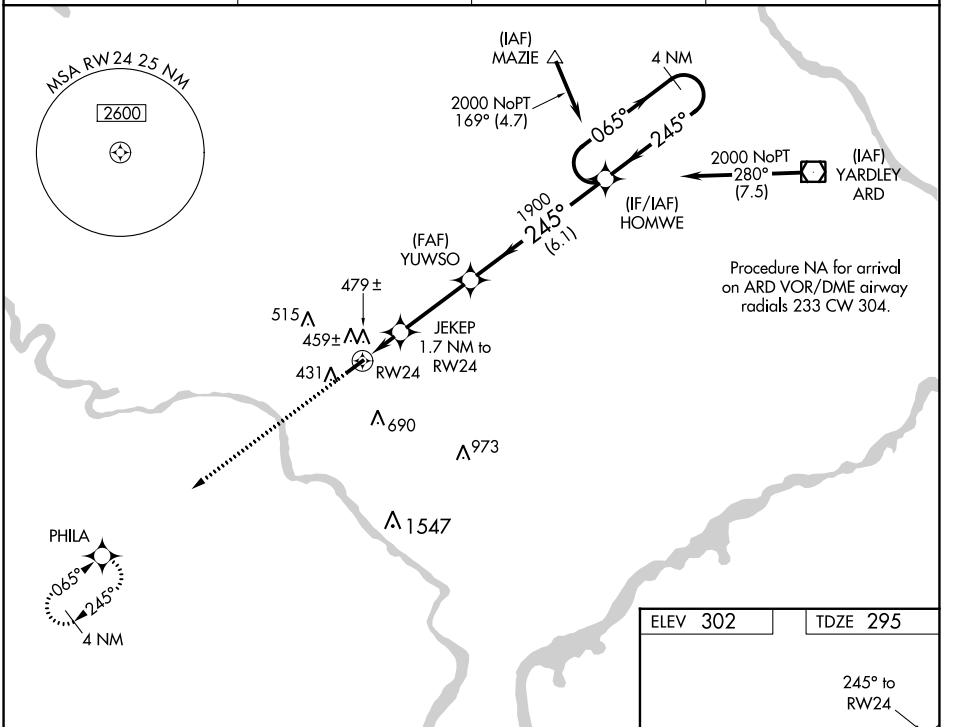

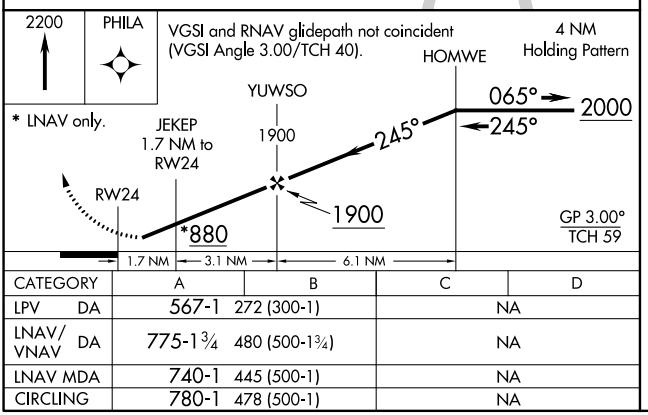

CATEGORY	A	B	C	D
LPV DA	567-1	272 (300-1)	NA	
LNAV/VNAV DA	775-1¾	480 (500-1¾)	NA	
LNAV MDA	740-1	445 (500-1)	NA	
CIRCLING	780-1	478 (500-1)	NA	

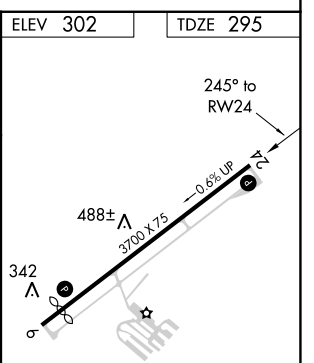

REIL Rwys 6 and 24 L
MIRL Rwy 6-24 L

NE-4, 22 FEB 2024 to 21 MAR 2024
NE-4, 22 FEB 2024 to 21 MAR 2024