

RNAV (RNP) Y RWY 18L

APCH CRS	Rwy Idg	9001
175°	TDZE	1382
	Arpt Elev	1382


AL-482 [USAF]

ALTUS AFB (KLTS)


RNP AR APCH - GPS	SALSF 	MISSED APPROACH: Climb to 4000 direct CIPNO and hold.
V* When ALS inop, increase RVR to 45, vis to 7/8 mile. ** When ALS inop, increase RVR to 55, vis to 1 mile.		

ATIS ★	FORT WORTH CENTER	APP CON	TOWER ★	GND CON	CLNC DEL
109.8 273.5	133.5 350.35	125.1 353.7	119.65 254.4	121.85 275.8	120.65 284.7

For uncompensated Baro-VNAV systems, procedure NA below -17°C (2°F) or above 54°C (130°F).

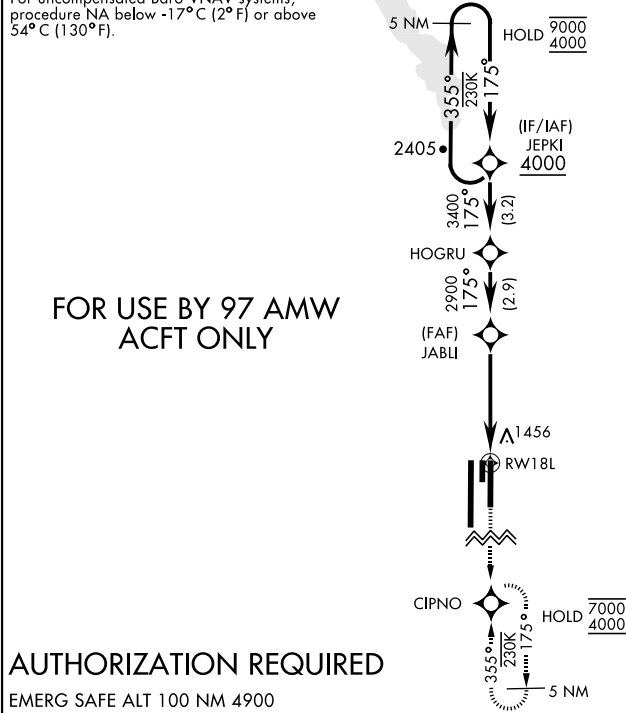

					ELEV 1382	TDZE 1382
					4000	CIPNO
					5 NM Holding Pattern	
					JEPKI 355° 9000 175° 4000	
					HOGRU 3400	
					JABLI 2900	
					RW18L 4.6 NM	
					GP 3.00° TCH 46	
CATEGORY	A	B	C	D		
RNP 0.10 DA*	1644/40	262	(300-¾)			
RNP 0.30 DA**	1729/40	347	(400-¾)			
CIRCLING	NOT AUTHORIZED					

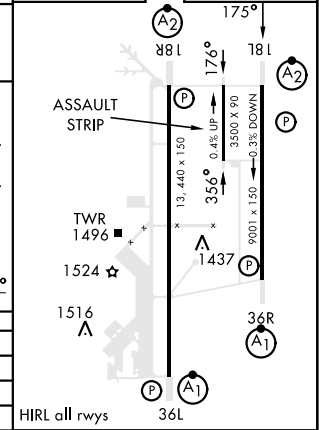

RNAV (RNP) Y RWY 18L

SC-1, 22 FEB 2024 to 21 MAR 2024

SC-1, 22 FEB 2024 to 21 MAR 2024