


|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>78038</b><br><b>W04A</b> | APP CRS<br><b>046°</b> | Rwy Idg<br>TDZE <b>420</b><br>Apt Elev <b>421</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 4

HUMBOLDT MUNI (M53)

|                 |                                                                                                                                                                                                                                                                                                                                          |                                                          |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| RNP APCH - GPS. | Rwy 4 helicopter visibility reduction below 1 SM NA. Use Jackson altimeter setting, when not received, use Dyersburg altimeter setting: increase all MDA 60 feet; increase LP Cats C/D visibility 1/8 mile; increase LNAV Cats C/D and Circling Cats C/D visibility 1/4 mile. Straight-in Rwy 4 NA at night, Circling Rwy 4 NA at night. | MISSED APPROACH:<br>Climb to 3000 direct FASKA and hold. |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|

|                            |                                        |                               |
|----------------------------|----------------------------------------|-------------------------------|
| MKL ASOS<br><b>119.325</b> | MEMPHIS CENTER<br><b>134.65 316.15</b> | UNICOM<br><b>122.8 (CTAF)</b> |
|----------------------------|----------------------------------------|-------------------------------|

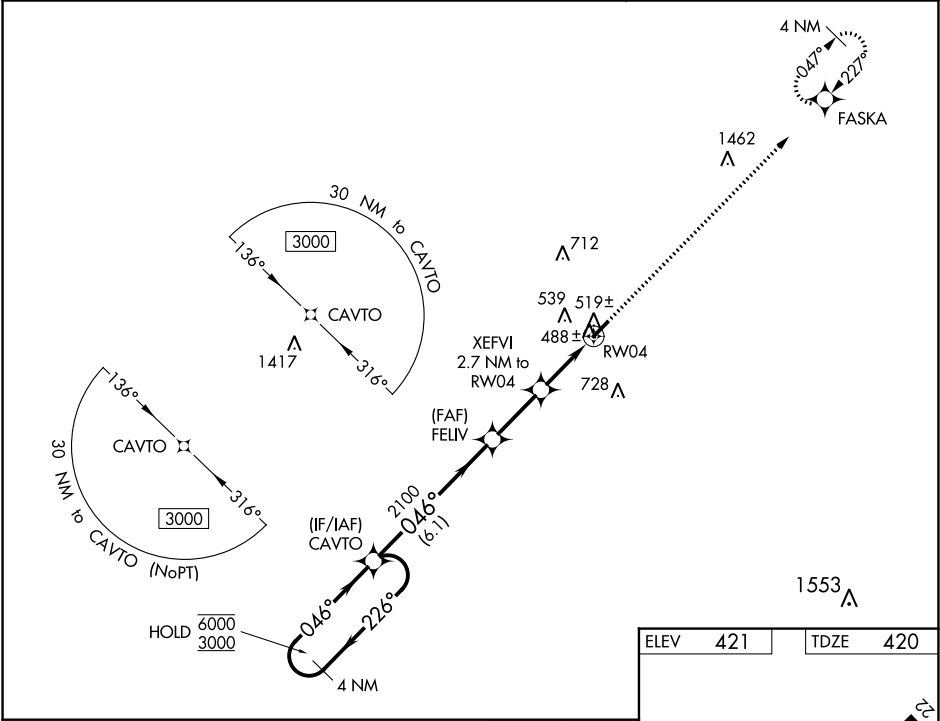

|                      |                      |                             |                       |                               |       |
|----------------------|----------------------|-----------------------------|-----------------------|-------------------------------|-------|
| 4 NM Holding Pattern |                      | Visual Segment - Obstacles. |                       | 3000                          | FASKA |
| CAVTO                |                      | FELIV                       |                       | XE FVI<br>2.7 NM to RW04      |       |
| 6000 ← 226°          |                      | 2100                        |                       | RW04                          |       |
| 3000 → 046°          |                      | 1300                        |                       |                               |       |
|                      |                      | 6.1 NM                      |                       | 2.5 NM                        |       |
|                      |                      |                             |                       | 2.7 NM                        |       |
| CATEGORY             | A                    | B                           | C                     | D                             |       |
| LP MDA               | 780-1                |                             | 360 (400-1)           |                               |       |
| LNAV MDA             | 800-1                |                             | 380 (400-1)           |                               |       |
| CIRCLING             | 900-1<br>479 (500-1) | 920-1<br>499 (500-1)        | 1120-2<br>699 (700-2) | 1120-2 1/4<br>699 (700-2 1/4) |       |

