




WAAS CH 53537 W21A	APP CRS 205°	Rwy Idg 5197 TDZE 935 Apt Elev 937
--	------------------------	---

RNAV (GPS) RWY 21
DELAWARE COUNTY RGNL (MIE)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all DA 121 feet and all MDA 140 feet; increase LPV all Cats and LNAV Cats C/D visibility $\frac{3}{8}$ mile and LNAV/VNAV all Cats and Circling Cats C/D visibility $\frac{1}{2}$ mile. **▲** Baro-VNAV and VDP NA when using Fort Wayne Intl altimeter setting. Helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH:
Climb to 2800 direct
APPAL and hold.

ATIS 133.25	INDIANAPOLIS APP CON 120.65 317.8	MUNCIE TOWER ★ 120.1 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

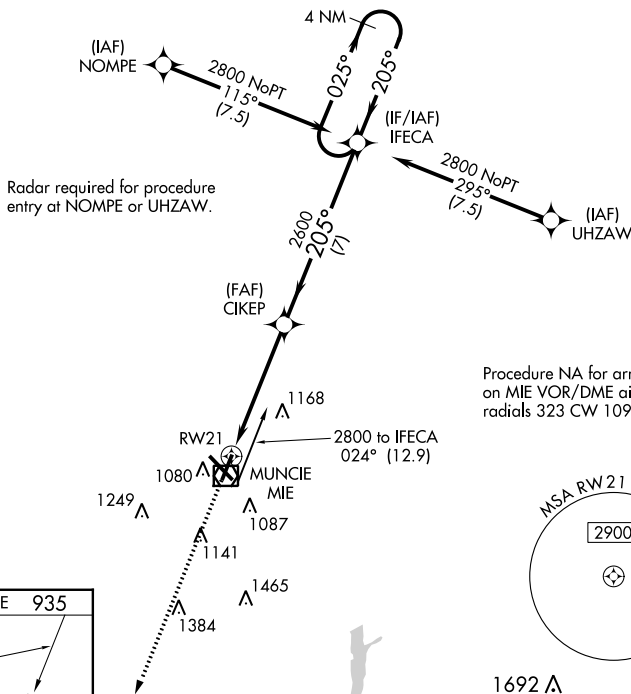

FIFV	Q37		TD7E	Q35
------	-----	---	------	-----

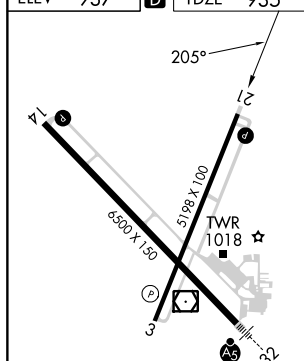

HIRL Rwy 14-32 **L**
MIRL Rwy 3-21 **L**
REIL Rwy 3, 14 and 21 **L**

[illegible]