

APCH CRS	Rwy ldg	5001
222°	TDZE	15
	Arpt Elev	18


[USN]

RNAV (GPS) RWY 22

CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

RNP APCH	MISSED APPROACH: Climb to 600, then climbing left turn to 2000 direct TYSON and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (129°F).	

ATIS ★ 127.9 290.9	APP CON 128.675 343.75	NAVY CORPUS TOWER ★ 134.85 0 340.2	GND CON 118.7 257.85	CLNC DEL 314.3	ASR/ PAR
-----------------------	---------------------------	---------------------------------------	-------------------------	-------------------	-------------

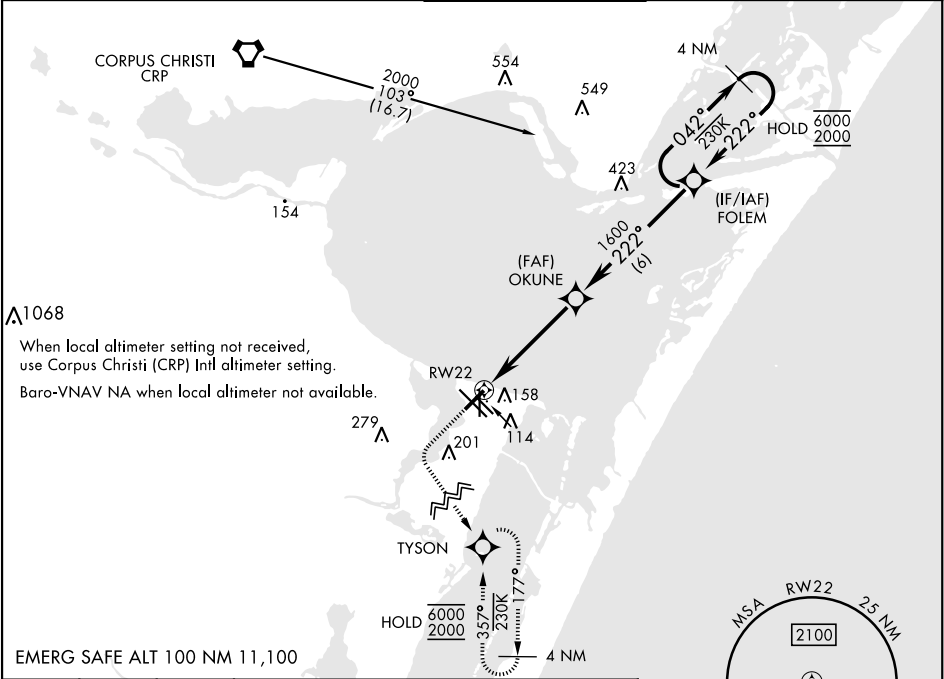

EMERG SAFE ALT 100 NM 11,100


600

2000


TYSON

VDP NA when using Corpus Christi (CRP) Intl altimeter setting.

4 NM Holding Pattern

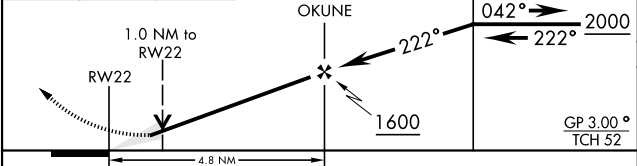

CATEGORY	A	B	C	D
LNAV MDA	380-1	365	(400-1)	
LNAV/VNAV DA	320-7/8	305	(400-7/8)	380-1 365 (400-1)
CIRCLING	460-1 422 (500-1)	480-1 462 (500-1)	520-1½ 502 (600-1½)	580-2 562 (600-2)
CORPUS CHRISTI (CRP) INTL ALTIMETER SETTING				
LNAV MDA	400-1	385 (400-1)	400-1½	385 (400-1½)
CIRCLING	500-1	482 (500-1)	540-1½ 522 (600-1½)	620-2 602 (700-2)

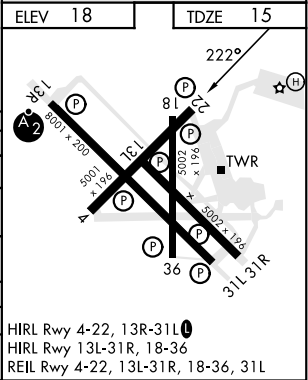

SC-3, 22 FEB 2024 to 21 MAR 2024

SC-3, 22 FEB 2024 to 21 MAR 2024