

WAAS Chan 50085 W32A	APCH CRS 322°	Rwy Idg 13,501 TDZE 227 Arpt Elev 228
--	-------------------------	--

AL-5067 [USN]

LEMOORE NAS (REEVES FIELD) (KNLC)


T * When ALS inop, increase vis to $\frac{3}{4}$ mile.
 ** When ALS inop, increase CAT AB vis to 1 mile; CAT CD vis to $1\frac{1}{4}$ miles.



MISSED APPROACH: Climb to 1000, then climbing left turn to 3100 direct CREEZ and hold.


ATIS ★	APP CON	TOWER ★	GND CON	CLNC DEL	ASR/PAR
121.575 327.15	124.1 269.025 (N) 118.15 269.025 (S)	128.3 340.2	121.65 305.2	124.1 371.9	

DME/DME RNP-0.3 NA



For uncompensated Baro-VNAV systems, LNAV/VNAV procedure NA below -15° C (5° F) and above 54° C (129° F).

Simultaneous approaches authorized.
LNAV procedure NA during Simultaneous operations.
Use of FD or AP providing RNAV track guidance required
during simultaneous operations.




EMERG SAFE ALT 100 NM 16,500

ELEV 228		TDZE 227
----------	--	----------



TDZL/CL Rwy 32L
REIL all rws
HIRL all rws

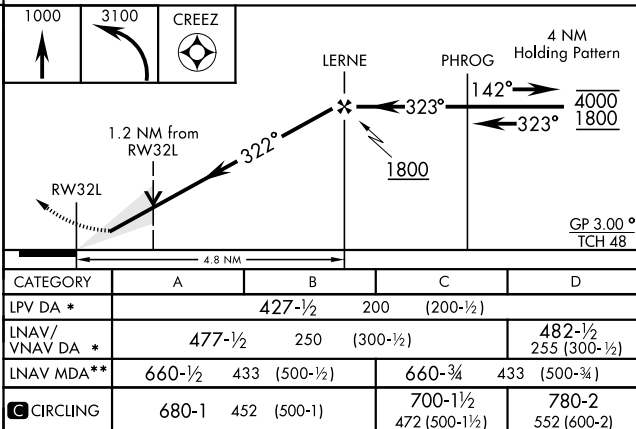

LEMOORE, CALIFORNIA

36°20'N-119°57'W

LEMOORE NAS (REEVES FIELD) (KNLC)

Amdt 6 19MAY22

RNAV (GPS) RWY 32L

SW-2, 22 FEB 2024 to 21 MAR 2024

SW-2, 22 FEB 2024 to 21 MAR 2024