

WAAS CH 86203 W35A	APP CRS 350°	Rwy Idg 10000 TDZE 464 Apt Elev 501
--	------------------------	--

RNAV (GPS) Y RWY 35L

LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP APCH.

⚠



Circling Rwy 11 NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to 1½ SM.

ALSF-2

ⓐ

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct DAMEN and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6	CLNC DEL 126.1 275.8	CPDLC
--------------------------	--	--	-------------------------------	--------------------------------	-------

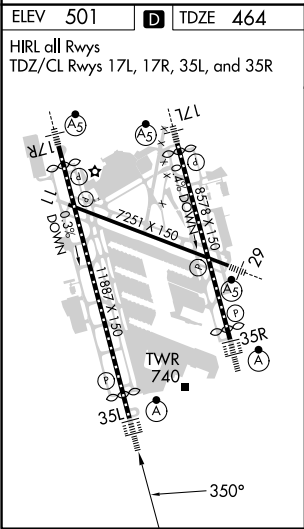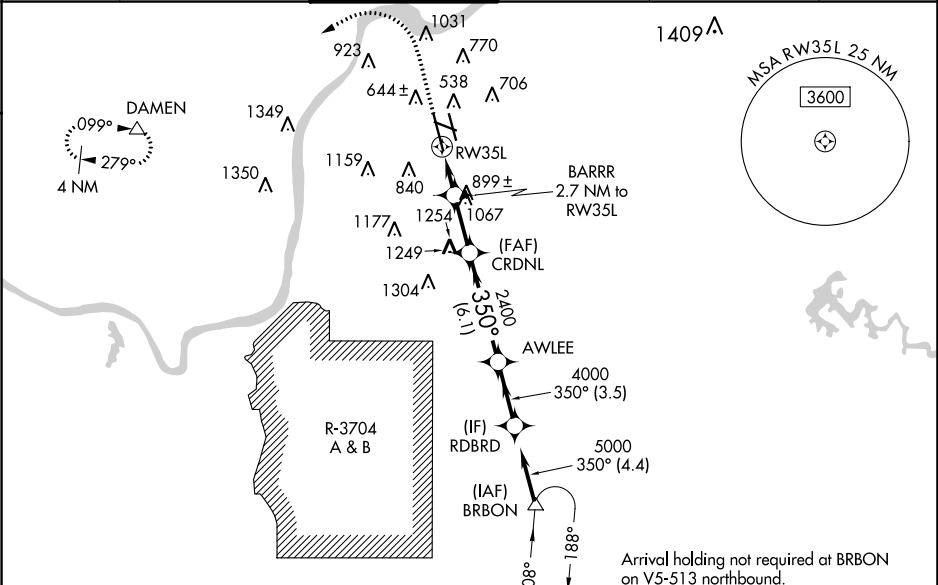

1000	3000	DAMEN	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).			
↑	↪	△				
* LNAV only.						
CATEGORY	A	B	C	D		
LPV DA	664/18		200 (200-½)			
LNAV/VNAV DA	904/50		440 (500-1)			
LNAV MDA	1000/24	536 (500-½)	1000/55	536 (500-1)		
CIRCLING	1040-1	1140-1	1160-1¾	1400-3		
	539 (600-1)	639 (700-1)	659 (700-1¾)	899 (900-3)		