


ILS RWY 28L (SA CAT II)
SAN FRANCISCO INTL (SFO)

*Missed approach requires minimum climb of 330 feet per NM to 1600.

A Requires specific OPSPEC, MSPEC, or LOA approval.


[illegible]

HIRL All Rwys
TDZ/CL Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L



SFO R-275	INT
-----------	-----

Use I-SFO DME when on the localizer course.

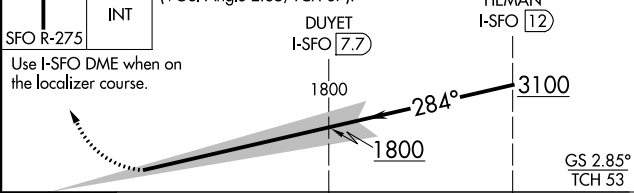

	1066	5.7 NM	4.3 NM	
CATEGORY	A	B	C	D
S-ILS 28L*	RA 113/12 100 DA 113			

SA CAT II ILS - SPECIAL AIRCREW AND AIRCRAFT CERTIFICATION REQUIRED