

WAAS CH 72933 W32A	APP CRS 319°	Rwy Idg TDZE 1268 Apt Elev 1268	8000
--	------------------------	---	-------------

RNAV (GPS) RWY 32

SPRINGFIELD-BRANSON NTL (SGT¹)



▼

▲

Baro-VNAV and VDP NA when using Monnett altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Monnett altimeter setting and increase all DA 90 feet and all MDA 100 feet; increase LPV all Cts visibility ⅓ mile, LNAV/VNAV all Cts ⅓ mile, LNAV Cts C and D ¼ mile and Circling Cat C ¼ mile and Cat D ½ mile. DME/DME RNP- 0.3 NA.

MISSED APPROACH:
Climb to 3000 direct JOGPU and hold.

ATIS 135.125	SPRINGFIELD APP CON 124.95 290.5	SPRINGFIELD TOWER 119.9 257.8	GND CON 121.9 251.15	CLNC DEL 123.675
------------------------	--	---	--------------------------------	----------------------------

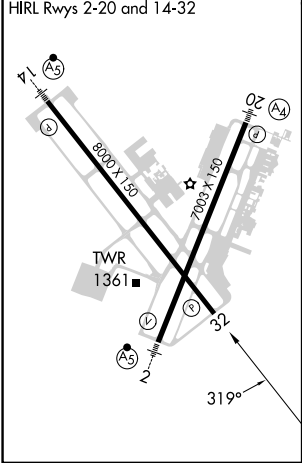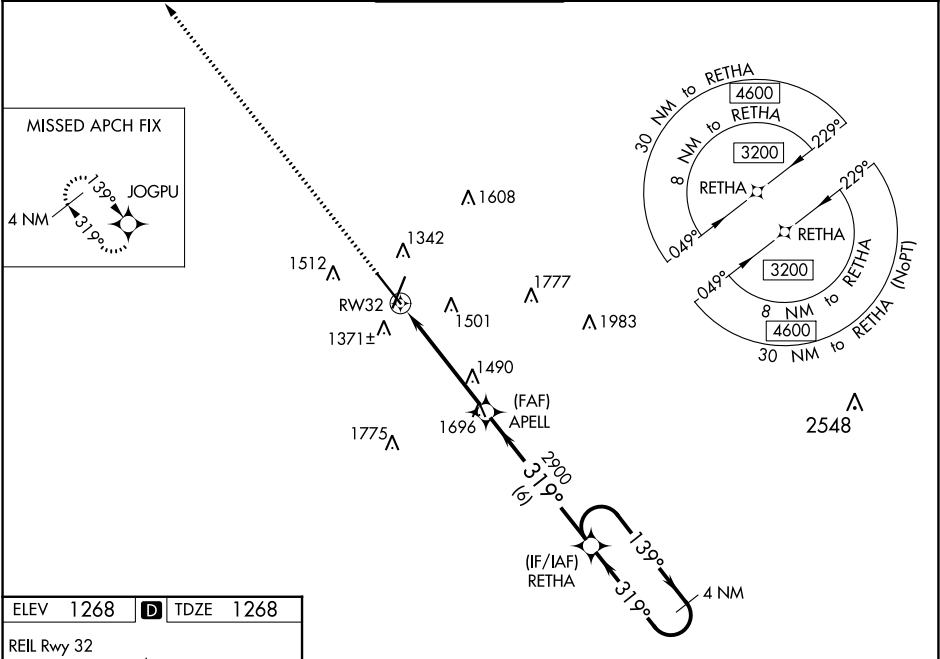

3000

JOGPU

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 35).

4 NM

Holding Pattern

RETHA

139°

319°

3200

GP 3.00°

TCH 51

APELL

2900

2900

1.4 NM

3.6 NM

6 NM

*LNAV only.

*1.4 NM to RW32

RW32

CATEGORY	A	B	C	D
LPV	DA	1518-1	250 (300-1)	
LNAV/VNAV	DA	1660-1¼	392 (400-1¼)	
LNAV	MDA	1740-1	472 (500-1)	1740-1⅓ 472 (500-1⅓)
CIRCLING	1760-1	1820-1	1820-1½	1920-2
	492 (500-1)	552 (600-1)	552 (600-1½)	652 (700-2)