


WAAS CH 99502 W20A	APP CRS 196°	Rwy Idg 5700 TDZE 54 Apt Elev 56
--	------------------------	---

RNAV (GPS) Y RWY 20R

JOHN WAYNE/ORANGE COUNTY (SNA)

RNP APCH - GPS. RADAR required. ⚠ Circling Rwy 20L NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C or above 54°C. For inop ALS increase LNAV/VNAV visibility to 1¾ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.				MALSR 	MISSED APPROACH: Climb to 3000 direct MINOE.	
D-ATIS 126.0	SOCAL APP CON 121.3 263.1	JOHN WAYNE TOWER ★ 126.8 (CTAF) 0 343.625	GND CON 120.8	CLNC DEL 118.0	CPDLC	UNICOM 122.95

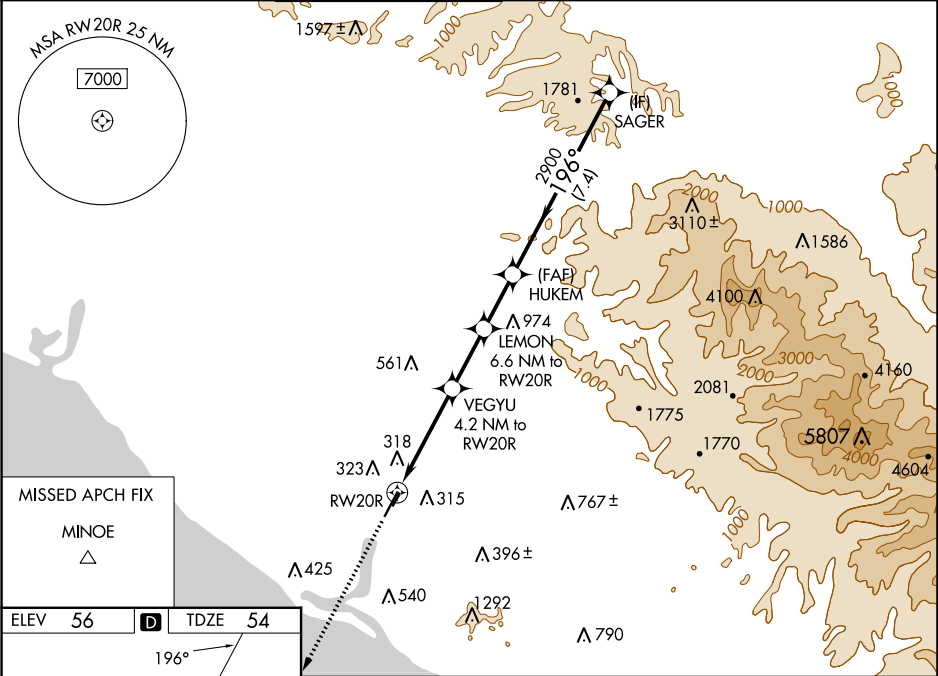

ELEV 56	D	TDZE 54
REIL Rwy 20L MIRL Rwy 2R-20L HIRL Rwy 2L-20R		
3000 MINOE VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 68).		
HUKEM 2900 LEMON 6.6 NM to RW20R VEGYU 4.2 NM to RW20R RW20R 1.5 NM to RW20R GP 3.00° TCH 51		
CATEGORY	A	B
LPV DA*	255/24	201 (200-½)
LNAV/VNAV DA	516/50	462 (500-1)
LNAV MDA	580/24 526 (600-½)	580/55 526 (600-1)
C CIRCLING	640-1 584 (600-1)	840-2¼ 784 (800-2¼) 1160-3 1104 (1200-3)