


WAAS CH 50530 W29B	APP CRS 292°	Rwy Idg 8008 TDZE 331 Apt Elev 336
--	------------------------	---


RNAV (GPS) RWY 29L
FRESNO YOSEMITE INTL (FAT)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.	MISSED APPROACH: Climb to 2000 direct WOSIM and hold.
--	---

ATIS 121.35 273.6	FRESNO APP CON 119.6 351.95	FRESNO TOWER 118.2 251.1	GND CON 121.7 348.6	CLNC DEL 124.35 348.6
-----------------------------	---------------------------------------	------------------------------------	-------------------------------	---------------------------------

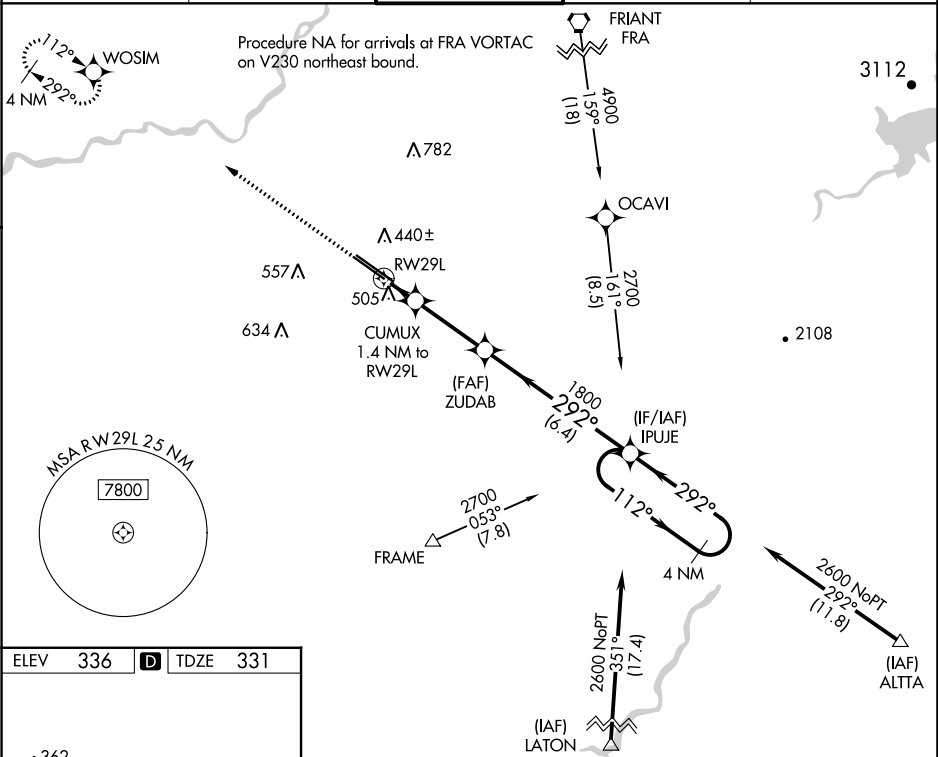

ELEV 336	D	TDZE 331
----------	---	----------

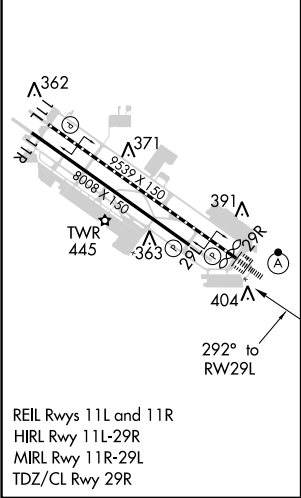

2000

↑

WOSIM

*LNAV only.

CUMUX

1.4 NM to RWY29L

ZUDAB

1800

IPUJE

4 NM Holding Pattern

RWY29L

112°→

2600

292°←

292°

GP 3.00°

TCH 52

*820

1800

1.4 NM

3.1 NM

6.4 NM

CATEGORY	A	B	C	D
LPV DA	581-¾ 250 (300-¾)			
LNAV/VNAV DA	667-1⅛ 336 (400-1⅛)			
LNAV MDA	760-1	429 (500-1)	760-1¼	429 (500-1¼)
CIRCLING	820-1	484 (500-1)	920-1½	920-2
			584 (600-1½)	584 (600-2)

SW-2, 22 FEB 2024 to 21 MAR 2024

SW-2, 22 FEB 2024 to 21 MAR 2024